

09/22/00
c885 U.S. PTO

09-25-00
A
FISH & RICHARDSON P.C.

Frederick P. Fish
1855-1930

W.K. Richardson
1859-1951

September 22, 2000

Attorney Docket No.: 07319/087001

Box Patent Application
Commissioner for Patents
Washington, DC 20231

4350 La Jolla Village Drive
Suite 500
San Diego, California
92122

Telephone
858 678-5070

Facsimile
858 678-5099

Web Site
www.fr.com

jc841 U.S. PTO
09/668824
09/22/00

Presented for filing is a new patent application claiming priority from a provisional patent application of:

Applicant: MARK A. HUNT

Title: MULTILAYER CONTROL OF GOBO SHAPE

Enclosed are the following papers, including those required to receive a filing date under 37 CFR 1.53(b):

	<u>Pages</u>
Specification	41
Claims	10
Abstract	1
Declaration	[To be Filed at a Later Date]
Drawing(s)	13

Enclosures:
— Postcard.

Under 35 USC §119(e)(1), this application claims the benefit of prior U.S. provisional application 60/155,513, filed September 22, 1999.

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL584934357US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D C 20231

Date of Deposit September 22, 2000

Signature Derek W. Norwood

Derek W. Norwood
Typed or Printed Name of Person Signing Certificate

FR

BOSTON

DALLAS

DELAWARE

NEW YORK

SAN DIEGO

SILICON VALLEY

TWIN CITIES

WASHINGTON, DC

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: MULTILAYER CONTROL OF GOBO SHAPE
APPLICANT: MARK A. HUNT


CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL584934357US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

Date of Deposit September 22, 2000

Signature



Derek W. Norwood
Typed or Printed Name of Person Signing Certificate

MULTILAYER CONTROL OF GOBO SHAPE

This application claims the benefit of U.S.
Provisional Application No.60/155,513, filed on September
5 22, 1999.

Field

The present invention relates to a system of
controlling light beam pattern ("gobo") shape in a
10 pixilated gobo control system using a multilayer control.

Background

US patent number _____ describes a stage lighting
system which operates based on computer-provided commands to
15 form special effects. One of those effects is control of
the shape of a light pattern that is transmitted by the
device. This control is carried out on a pixel-by-pixel
basis, hence referred to in this specification as pixilated.
Control is also carried out using an x-y controllable
20 device. The embodiment describes using a digital mirror
device, but other x-y controllable devices such as a grating
light valve, are also contemplated.

The computer controlled system includes a digital
signal processor which is used to create an image command.
25 That image command controls the pixels of the x-y

controllable device to shape the light that it is output
from the device.

The system described in the above-referenced
application allows unparalleled flexibility in selection of
5 gobo shapes and movement. This opens an entirely new
science of controlling gobos.

Summary

The present disclosure defines communicating with an x-
10 y controllable device to form special electronic light
pattern shapes. More specifically, the present application
describes different aspects of communication with an
electronic gobo. These aspects include improved processing
or improved controls for the gobo and various ways of
15 forming the user interface for such a device.

The present specification discloses controlling gobos
based on layers. A complex light passing outline is defined
by a number of different layers, each of which includes some
number of items for the gobo.

Brief Description of the Drawings

These and other aspects of the invention will now be
described with reference to the attached drawings, in which:

FIG. 1 shows a block diagram of the basic system
25 operating the embodiment;

FIG. 2 shows a basic flowchart of operation;

FIG. 3 shows a flowchart of forming a replicating circles type gobo;

FIGS. 4A through 4G show respective interim results of carrying out the replicating circles operation;

5 FIG. 5 shows the result of two overlapping gobos rotating in opposite directions; and

FIGS. 6(1) through 6(8) show a z-axis flipping gobo.

FIGS. 7A - 7C show overlapping square gobos.

FIG. 8 shows the DSP for this operation.

10 FIG. 9 shows a y/c conversion.

FIG. 10 shows a framing shutter.

FIG. 11 shows a transfer controller.

FIG 12 shows a layout of the layered system.

FIG. 13 shows a gobo selection tree.

15 Description of the Preferred Embodiment

FIG. 1 shows a block diagram of the hardware used according to the preferred embodiment. As described above, this system uses a digital mirror device 100, which has also
20 been called a digital mirror device ("DMD") and a digital light processor device ("DLP"). More generally, any system which allows controlling shape of light on a pixel basis, including a grating light valve, could be used as the light shaper. This light shaper forms the shape of light
25 which is transmitted. FIG. 1 shows the light being transmitted as 102, and shows the transmitted light. The information for the digital mirror 100 is calculated by a

digital signal processor 106. Information is calculated based on local information stored in the lamp, e.g., in ROM 109, and also in information which is received from the console 104 over the communication link.

5 The operation is commanded according to a format.

 The preferred data format provides 4 bytes for each of color and gobo control information.

 The most significant byte of gobo control data, (`dfGobo`) indicates the gobo type. Many different gobo
10 types are possible. Once a type is defined, the gobo formed from that type is represented by a number. That type can be edited using a special gobo editor described herein. The gobo editor allows the information to be modified in new ways, and forms new kinds of images and effects.

15 The images which are used to form the gobos may have variable and/or moving parts. The operator can control certain aspects of these parts from the console via the gobo control information. The type of gobo controls the gobo editor to allow certain parameters to be edited.

20 The examples given below are only exemplary of the types of gobo shapes that can be controlled, and the controls that are possible when using those gobo shapes. Of course, other controls of other shapes are possible and predictable based on this disclosure.

25

First Embodiment

A first embodiment is the control of an annulus, or "ring" gobo. The DMD 100 in Figure 1 is shown with the ring gobo being formed on the DMD. The ring gobo is type 000A. When the gobo type 0A is enabled, the gobo editor 110 on the console 104 is enabled and the existing gobo encoders 120, 122, 124, and 126 are used. The gobo editor 110 provides the operator with specialized control over the internal and the external diameters of the annulus, using separate controls in the gobo editor.

The gobo editor and control system also provides other capabilities, including the capability of timed moves between different edited parameters. For example, the ring forming the gobo could be controlled to be thicker. The operation could then effect a timed move between these "preset" ring thicknesses. Control like this cannot even be attempted with conventional fixtures.

Another embodiment is a composite gobo with moving parts. These parts can move though any path that are programmed in the gobo data itself. This is done in response to the variant fields in the gobo control record, again with timing. Multiple parts can be linked to a single control allowing almost unlimited effects.

Another embodiment of this system adapts the effect for an "eye" gobo, where the pupil of the eye changes its position (look left, look right) in response to the control.

Yet another example is a Polygon record which can be used for forming a triangle or some other polygonal shape.

The control can be likened to the slider control under a QuickTime movie window, which allows you to manually move to any point in the movie. However, our controls need not be restricted to timelines.

5 Even though such moving parts are used, scaling and rotation on the gobo is also possible.

The following type assignments are contemplated:

00 _ 0F = FixedGobo (with no "moving parts")
10 _ 1F = SingleCntrl (with 1 "moving part")
10 20 _ 2F = DoubleCntrl (with 2 "moving parts")
30 _ FF = undefined, reserved.

The remaining control record bytes for each type are defined as follows:

15 Byte: dfGobo2 dfGobo3 dfGobo4 #gobos/type, total
memory

_ FixedGobo: ID[23:16] ID[15:8] ID[7:0] 16M/type
256M SingleCntrl: ID[15:8] ID[7:0] control#1 64k/type
20 1M DoubleCntrl: ID[7:0] control#2 control#1 256/type
4k

As can be seen from this example, this use of the control record to carry control values does restrict the
25 number of gobos which can be defined of that type, especially for the 2-control type.

Console support:

The use of variant part gobos requires no modifications to existing console software for the ICON (7M) console. The Gobo editor in current ICON software already provides 4 separate encoders for each gobo. These translate directly to the values of the 4 bytes sent in the communications data packet as follows:

10	Byte:	dfGobo	dfGobo2	dfGobo3dfGobo4
	Enc:	TopRight	MidRight	BotRightBotLeft
	FixedGobo:	ID[23:16]	ID[15:8]	ID[7:0]
	SingleCntrl:	ID[15:8]	ID[7 0]	control#1
	DoubleCntrl:	ID[7:0]	control#2	control#1

These values would be part of a preset gobo, which could be copied as the starting point.

Once these values are set, the third and fourth channels automatically become the inner/outer radius controls. Using two radii allows the annulus to be turned "inside out".

Each control channel's data always has the same meaning within the console. The console treats these values as simply numbers that are passed on. The meanings of those numbers, as interpreted by the lamps change according to the value in dfGobo.

The lamp will always receives all 4 bytes of the gobo data in the same packet. Therefore, a "DoubleCntrl" gobo will always have the correct control values packed along with it.

5 Hence, the console needs no real modification. If a ``soft'' console is used, then name reassignments and/or key reassignments may be desirable.

Timing:

10 For each data packet, there is an associated "Time" for gobo response. This is conventionally taken as the time allotted to place the new gobo in the light gate. This delay has been caused by motor timing. In this system, variant gobo, the control is more dynamically used. If the
15 non-variant parts of the gobo remain the same, then it is still the same gobo, only with control changes. Then, the time value is interpreted as the time allowed for the control change.

20 Since different gobo presets (in the console) can reference the same gobo, but with different control settings, this allows easily programmed timed moves between different annuli, etc.

Internal Workings:

25 When the gobo command data is extracted from the packet at the lamp, the dfGobo byte is inspected first, to see if either dfGobo3 or dfGobo4 are significant in selecting the

image. In the case of the "Cntrl" variants, one or both of these bytes is masked out, and the resulting 32-bit number is used to search for a matching gobo image (by Gobo _1D) in the library stored in the lamp's ROM 109.

5 If a matching image is found, and the image is not already in use, then the following steps are taken:

1) The image data is copied into RAM, so that its fields may be modified by the control values. This step will be skipped if the image is currently active.

10 2) The initial control values are then recovered from the data packet, and used to modify certain fields of the image data, according to the control records.

3) The image is drawn on the display device, using the newly-modified fields in the image data.

15 If the image is already in use, then the RAM copy is not altered. Instead, a time-sliced task is set up to slew from the existing control values to those in the new data packet, in a time determined by the new data packet.

20 At each vertical retrace of the display, new control values are computed, and steps 2 (using the new control values) and 3 above are repeated, so that the image appears modified with time.

The image data records:

25 All images stored in the lamp are in a variant record format:

Header:

Length 32 bits, offset to next gobo in list.

Gobo _1D 32 bits, serial number of gobo.

5 Gobo records:

Length 32 bits, offset to next record.

Opcode 16 bits, type of object to be drawn.

Data Variant part - data describing object.

_Length 32 bits, offset to next record.

10 Opcode 16 bits, type of object to be drawn.

Data Variant part - data describing object.

_ EndMarker 64 bits, all zeroes - indicates end of gobo data.

+ Next gobo, or End Marker, indicating end of gobo list.

15

Gobos with controls are exactly the same, except that they contain control records, which describe how the control values are to affect the gobo data. Each control record contains the usual length and Opcode fields, and a field

20 containing the control number (1 or 2).

These are followed by a list of "field modification" records. Each record contains information about the offset (from the start of the gobo data) of the field, the size (8, 16 or 32 bits) of the field, and how its value depends on

25 the control value.

Length 32 bits, offset to next record

Opcode 16 bits = control_record (constant)
CntrlNum 16 bits = 1 or 2 (control number)
 /* field modification record #1 */
Address 16 bits, offset from start of gobo to affected field.
5 Flags 16 bits, information about field (size, signed,
 etc)
Scale 16 bits, scale factor applied to control before
 use
zPoint 16 bits, added to control value after scaling.
10 /* field modification record #2 */
Address 16 bits, offset from start of gobo to affected
 field.
Flags 16 bits, information about field (size, signed,
 etc)
15 Scale 16 bits, scale factor applied to control before
 use
zPoint 16 bits, added to control value after scaling.

As can be seen, a single control can have almost
20 unlimited effects on the gobo, since ANY values in the data
can be modified in any way, and the number of field
modification records is almost unlimited.

Note that since the control records are part of the
gobo data itself, they can have intimate knowledge of the
25 gobo structure. This makes the hard-coding of field offsets
acceptable.

In cases where the power offered by this simple structure is not sufficient, a control record could be defined which contains code to be executed by the processor. This code would be passed parameters, such as the address of the gobo data, and the value of the control being adjusted.

Example records.

The Annulus record has the following format:

Length	32 bits
10 Opcode	16 bits, = type_annulus
Pad	16 bits, unused
Centre_x	16 bits, x coordinate of centre
Centre_y	16 bits, y coordinate of centre
OuterRad	16 bits, outside radius (the radii get swapped
15 when drawn if their values are in the wrong order)	
InnerRad	16 bits, inside radius

It can be seen from this that it is easy to "target" one of the radius parameters from a control record. Use of two control records, each with one of the radii as a target, would provide full control over the annulus shape.

Note that if the center point coordinates are modified, the annulus will move around the display area, independent of any other drawing elements in the same gobo's data.

The Polygon record for a triangle has this format:

Length	32 bits
--------	---------

5

10

15

Second Embodiment

20

25

received at step 200 by determining that new mail has been received.

At step 202, the system copies the old gobo and switches pointers. The operation continues using the old
5 gobo until the draw routine is called later on.

At step 204, the new information is used to form a new gobo. The system uses a defined gobo ('`dfGobo'') as discussed previously which has a defined matrix. The type dfGobo is used to read the contents from the memory 109 and
10 thereby form a default image. That default image is formed in a matrix. For example, in the case of an annulus, a default size annulus can be formed at position 0,0 in the matrix. An example of forming filled balls is provided herein.

15 Step 206 represents calls to subroutines. The default gobo is in the matrix, but the power of this system is its ability to very easily change the characteristics of that default gobo. In this embodiment, the characteristics are changed by changing the characteristics of the matrix and
20 hence, shifting that default gobo in different ways. The matrix operations, which are described in further detail herein, include scaling the gobo, rotation, iris, edge, strobe, and dimmer. Other matrix operations are possible. Each of these matrix operations takes the default gobo, and
25 does something to it.

For example, scale changes the size of the default gobo.** Rotation rotates the default gobo by a certain

amount. Iris simulates an iris operation by choosing an area of interest, typically circular, and erasing everything outside that area of interest. This is very easily done in the matrix, since it simply defines a portion in the matrix
5 where all black is written.

Edge effects carry out certain effects on the edge such as softening the edge. This determines a predetermined thickness, which is translated to a predetermined number of pixels, and carries out a predetermined operation on the
10 number of pixels. For example, for a 50% edge softening, every other pixel can be turned off. The strobe is in effect that allows all pixels to be turned on and off at a predetermined frequency, i.e., 3 to 10 times a second. The dimmer allows the image to be made dimmer by turning off
15 some of the pixels at predetermined times.

The replicate command forms another default gobo, to allow two different gobos to be handled by the same record. This will be shown with reference to the exemplary third embodiment showing balls. Each of those gobos are then
20 handled as the same unit and the entirety of the gobos can be, for example, rotated. The result of step 206 and all of these subroutines that are called is that the matrix includes information about the bits to be mapped to the digital mirror 100.

25 At step 208, the system then obtains the color of the gobos from the control record discussed previously. This gobo color is used to set the appropriate color changing

circuitry 113 and 115 in the lamp 99. Note that the color changing circuitry is shown both before and after the digital mirror 100. It should be understood that either of those color changing circuits could be used by itself.

5 At step 210, the system calls the draw routine in which the matrix is mapped to the digital mirror. This is done in different ways depending on the number of images being used. Step 212 shows the draw routine for a single image being used as the gobo. In that case, the old gobo, now copied as
10 shown in step 202, is faded out while the new gobo newly calculated is faded in. Pointers are again changed so that the system points to the new gobo. Hence, this has the effect of automatically fading out the old gobo and fading in the new gobo.

15 Step 214 schematically shows the draw routine for a system with multiple images for an iris. In that system, one of the gobos is given priority over the other. If one is brighter than the other, then that one is automatically given priority. The one with priority 2, the lower priority
20 1, is written first. Then the higher priority gobo is written. Finally, the iris is written which is essentially drawing black around the edges of the screen defined by the iris. Note that unlike a conventional iris, this iris can take on many different shapes. The iris can take on not
25 just a circular shape, but also an elliptical shape, a rectangular shape, or a polygonal shape. In addition, the iris can rotate when it is non-circular so that for the

example of a square iris, the edges of the square can actually rotate.

Returning to step 206, in the case of a replicate, there are multiple gobos in the matrix. This allows the
5 option of spinning the entire matrix, shown as thin matrix.

An example will now be described with reference to the case of repeating circles. At step 200, the new gobo information is received indicating a circle. This is followed by the other steps of 202 where the old gobo is
10 copied, and 204 where the new gobo is formed. The specific operation forms a new gobo at step 300 by creating a circle of size diameter equals 1000 pixels at origin 00. This default circle is automatically created. FIG. 4A shows the default gobo which is created, a default size circle at 00.
15 It is assumed for purposes of this operation that all of the circles will be the same size.

At step 302, the circle is scaled by multiplying the entire circle by an appropriate scaling factor. Here, for simplicity, we are assuming a scaling factor of 50% to
20 create a smaller circle. The result is shown in FIG. 4B. A gobo half the size of the gobo of FIG. 4A is still at the origin. This is actually the scale of the subroutine as shown in the right portion of step 302. Next, since there will be four repeated gobos in this example, a four-loop is
25 formed to form each of the gobos at step 304. Each of the gobos is shifted in position by calling the matrix operator shift. In this example, the gobo is shifted to a quadrant

to the upper right of the origin. This position is referred to as π over 4 in the FIG. 3 flowchart and results in the gobo being shifted to the center portion of the top right quadrant as shown in FIG. 4C. This is again easily
5 accomplished within the matrix by moving the appropriate values. At step 308, the matrix is spun by 90 degrees in order to put the gobo in the next quadrant as shown in FIG. 4D in preparation for the new gobo being formed into the same quadrant. Now the system is ready for the next gobo,
10 thereby calling the replicate command which quite easily creates another default gobo circle and scales it. The four-loop is then continued at step 312.

The replicate process is shown in FIG. 4E where a new gobo 402 is formed in addition to the existing gobo 400.
15 The system then passes again through the four-loop, with the results being shown in the following figures. In FIG. 4F, the new gobo 402 is again moved to the upper right quadrant (step 306). In FIG. 4G, the matrix is again rotated to leave room for a new gobo in the upper right quadrant. This
20 continues until the end of the four-loop. Hence, this allows each of the gobos to be formed.

Since all of this is done in matrix operation, it is easily programmable into the digital signal processor. While the above has given the example of a circle, it should
25 be understood that this scaling and moving operation can be carried out for anything. The polygons, circles, annulus, and any other shape is easily scaled.

The same operation can be carried out with the multiple parameter gobos. For example, for the case of a ring, the variable takes the form annulus (inner R, outer R, x and y). This defines the annulus and turns of the inner radius, the outer radius, and x and y offsets from the origin. Again, as shown in step 3, the annulus is first written into the matrix as a default size, and then appropriately scaled and shifted. In terms of the previously described control, the ring gobo has two controls: control 1 and control 2 defined the inner and outer radius.

Each of these operations is also automatically carried out by the command repeat count which allows easily forming the multiple position gobo of FIGS. 4A-4G. The variable auto spin defines a continuous spin operation. The spin operation commands the digital signal processor to continuously spin the entire matrix by a certain amount each time.

One particularly interesting feature available from the digital mirror device is the ability to use multiple gobos which can operate totally separately from one another raises the ability to have different gobos spinning in different directions. When the gobos overlap, the processor can also calculate relative brightness of the two gobos. In addition, one gobo can be brighter than the other. This raises the possibility of a system such as shown in FIG. 5. Two gobos are shown spinning in opposite directions: the circle gobo 500 is spinning the counterclockwise direction,

while the half moon gobo 502 is spinning in the clockwise direction. At the overlap, the half moon gobo which is brighter than the circle gobo, is visible over the circle gobo. Such effects were simply not possible with previous systems. Any matrix operation is possible, and only a few of those matrix operations have been described herein.

A final matrix operation to be described is the perspective transformation. This defines rotation of the gobo in the Z axis and hence allows adding depth and perspective to the gobo. For each gobo for which rotation is desired, a calculation is preferably made in advance as to what the gobo will look like during the Z axis transformation. For example, when the gobo is flipping in the Z axis, the top goes back and looks smaller while the front comes forward and looks larger. FIGS. 5A-5C show the varying stages of the gobo flipping. In FIG. 5D, the gobo has its edge toward the user. This is shown in FIG. 5D as a very thin line, e.g., three pixels wide, although the gobo could be zero thickness at this point. Automatic algorithms are available for such Z axis transformation, or alternatively a specific Z axis transformation can be drawn and digitized automatically to enable a custom look.

Third Embodiment

The gobo record format described above can have two gobos therein. These two gobos can be gobo planes, which can be used to project one image superimposed over another

image in a predefined way. For example, a first image can be a pattern that emits light, e.g., a standard gobo. The second image can be totally transparent, or can have holes through which the first image can be seen.

5 Analog gobos often project light through two gobos. The light is then projected through the intersection between the two gobos. Effectively, this takes an AND function between the gobos. Light will only be passed in places where both gobos are open.

10 In the present system, any function between two images can be projected as an overall gobo shape. The system can, e.g., project the "or" between the two images. Moreover, the two images can be projected in separate colors. Therefore, for example, the system used in FIGS. 7A-7B could
15 be carried out in software.

20 A first gobo shown in FIG. 7A is a square gobo. For purposes of this example, the square gobo is projected in red, forming a first lighted portion. The exterior non-projected portion 702 is black. FIG. 7B shows the second gobo to be added to the first gobo. The second gobo is an off-center circle 704 to be projected in blue. The AND between these two gobos would transmit only the intersection between the two gobos, shown by the hatched portion 706. Moreover, this portion could only be transmitted in the
25 additive or subtractive combination between the two colors, red and blue.

The present system defines the two images as separate planes. This enables transmitting the "or" between the two images. Therefore, both the first image 700 and the second image 704 are transmitted. Moreover, the intersection
5 portion of the image 706 can be made in any desired color, either the color of either, the color of the subtractive combination, or a totally different color while this system describes an "or" operation, it also encompasses any combination between the gobos: e.g., X or, Schmitt-triggered
10 (hysteresis-induced) and/or, others.

The gobo operation is simplified and made more efficient by using a transfer controller as described herein.

FIG. 8 shows the basic block diagram of this
15 embodiment. The Digital Signal Processor (DSP) 800 effectively functions as the central processing unit. The preferred DSP for this embodiment is the TI TMS 320C80. This includes a 64-bit bus 802. Memory 804 is attached to the bus 802. The memory 804 effectively forms a working
20 portion. A transfer controller 810 is provided and allows increased speed. The transfer controller can take control of the bus and can carry out certain functions. One such function is a direct memory access. This allows moving information from the program memory 804 to a desired
25 location. The transfer controller receives information about the data to be moved, including the start location of the data, the number of bytes of the data, and the end

location of the data. The destination and operation is also specified by the data 809. The transfer controller 810 then takes the data directly from the memory 804, processes it, and returns it to the memory or to the DMP without DSP intervention. The CPU can then therefore tell the transfer controller to take some action and then can itself do something else.

Also on the bus 802 is a hardware block 820 which is preferably formed from a Field Programmable Gate Array (FPGA). The FPGA can be configured into logical blocks as shown. The DSP also sends commands that 807 reconfigure the FPGA as needed. The FPGA can be reconfigured to form fast Synchronous Dynamic Random Access Memory (SDRAM) shown as 822.

The preferred DSP 800 is a TI TMS 320C80. This device includes an associated transfer controller which is a combined memory controller and DMA (direct memory access) machine. It handles the movement of data and instructions within the system as required by the master processor, parallel processors, video controller, and external devices.

The transfer controller performs the following data-movement and memory-control functions:

- MP and ADSP instruction-cache fills
- MP data-cache fills and dirty-block write-back
- MP and ADSP packet transfers (PTs)
- Externally initiated packet transfers (XPTs)
- VC packet transfers (VCPTs)

MP and ADSP direct external accesses (DEAs)

VC shift-register-transfer (SRTs)

DRAM refresh

sExternal bus requests

- 5 Operations are performed on the cache sub-block as requested
by the processors' internal cache controllers. DEA
operations transfer off-chip data directly to or from
processor registers. Packet transfers are the main data
transfer operations and provide an extremely flexible method
10 for moving multidimensional blocks of data (packets) between
on-chip and/or off-chip memory.

Key features of the this specific transfer controller
include:

Crossbar interface

- 15 64-bit data path

Single-cycle access

External memory interface

4G-byte address range dynamically configurable memory cycles

Bus size of 8, 16, 32, or 64 bits

- 20 Selectable memory page size

Selectable row/column address multiplexing

Selectable cycle timing

Big or little indian operation Cache, VRAM, and refresh
controller

- 25 Programmable refresh rate

VRAM block-write support

Independent source and destination addressing

Autonomous address generation based on packet transfer parameters

Data can be read and written at different rates

Numerous data merging and spreading functions can be
5 performed during transfers

Intelligent request prioritization

Hence, the transfer controller allows definition of the limits of the message/data, and then the information can be automatically handled. The transfer controller also can
10 generate a table of end points, carry out direct-memory access, and manipulate the data while transferring the data.

The SDRAM 822 can be used as fast-image memory, and can be connected, for example, to an image storage memory 830. The FPGA can also be configured to include serial
15 interfaces 824, 826 with their associated RAM 828, 829 respectively. Other hardware components can also be configured by the FPGA.

Since the FPGA can be reconfigured under control of the processor 800, the FPGA can be reconfigured dynamically to
20 set an appropriate amount of SDRAM 822. For example, if a larger image or image processing area is necessary, the FPGA can be reconfigured to make more of it into image memory. If a smaller image is desired, less of the FPGA can be made into SDRAM, allowing more of the FGPA for other hardware
25 functions. Moreover, the interfaces 832, 834 can be dynamically reconfigured. For example, the baud rate can be changed, bus width can be reconfigured, and the like.

The serial receiver 824 receives the ICON data from the controller, as described in our copending application, 7319/63. The serial driver 826 produces a serial output that can drive, for example, an RS422 bus that runs the
5 motors.

The C80 DSP includes the transfer controller as a part thereof. An alternative embodiment uses a different DSP. The functions of the transfer controller are then replicated in the FPGA, as desired. For example, an alternative
10 possible DSP is the C6201 which uses the Very Large Instruction Word "VLIW" architecture. This system can use, for example, 128-bit instructions. However, since this is connected to the 32-bit data bus, a transfer controller could be highly advantageous. This would enable the
15 equivalent of direct memory access from the memory. FIG. 11 shows the gate array schematic of this alternate embodiment in which the transfer controller is part of the FPGA.

A second embodiment of the gate array logic, as preferably used according to the present system, is shown in
20 FIG. 11. This gate array logic is formed in the field-programmable gate array and carries out many of the functions described herein. Block 1100 corresponds to a transparency device which calculates values associated with transparency. Block 1102 is a dual-port RAM which receives
25 the VLIW at one port thereof, and outputs that value to a multiplexer 1104, which converts it to the 32 bits used by the CPU/DSP. The write poster 1104. Transfer

controller 1106 has the functionality discussed above, and
is controlled directly by the CPU data received on
line 1105. The transfer controller can have two lists of
parameters, each 64 bits in width. These values are
5 received on the list receivers 1110, 1112.

Another issue noted by the current inventors is the
size of images. If possible, it is desirable to avoid using
uncompressed images. For example, one easy form image to
manipulate is a bitmap, also known as a ".bmp" type image.

10 The bitmap represents each pixel of the image by a number of
bits, e.g., for an 8-bit 3-primary color image, each pixel
would require 24 bits. This can, unfortunately, use
incredible amounts of storage. However, since the bit map
has a 1-to-1 correspondence with the image, it can be
15 relatively easy to manipulate the bit map. For example, a
matrix representing the bitmap can be easily manipulated,
e.g., rotated. The image form can be compressed, e.g., to a
GIF or JPEG image. This image, however, loses the one-to-
one correspondence and hence cannot be directly processed as
20 easily.

One aspect of the present system is to store the image
as a compressed image, and most preferably as polygons. The
existing software package, Adobe Streamline (TM), breaks a
bitmap into multiple polygons. The polygons can then be
25 defined as vectors. An additional advantage is that the
vectors can be easily processed by the DSP. The DSP 800
then builds the image from the vectors. Since the image is

defined as vectors, it can be easily related via matrix arithmetic. Using Adobe Streamline, for example, an 800 kilobyte bit map can be compressed to a 30 kilobyte vector image.

5 Another improvement of the present system is the control of the gobo using filters.

In an analog gobo system, a filter can be used to blur the image, for example. Many different kinds of filters are used. For example, some filters randomly distort the image.
10 Other filters affect the image in different ways. The blurring can be carried out as an electronic filter. A preferred user interface defines the filter as a separate gobo that is multiplied, e.g., and ed OR ed with the first gobo.

15 More generally, a filter can be used to alter the image in some way, e.g., scaler the image, decay the image, or the like. The blur can be used to make the image apparently out of focus in some locations. The filter uses a second gobo that simulates the effect of an analog filter. For example,
20 one operation simulates the optical effect of the glass that forms the filter in an analog gobo. That glass is used to make an algorithm that emulates the optical properties of the glass. Those optical properties are then pushed through the matrix representing the gobo, thereby effecting a
25 digital representation of the filter. In one aspect, the filter is considered as a separate gobo which is OR ed with the second gobo. In this case, the dual gobo definition

described above can be used. Alternatively, the filter can simply be added to the gobo-defining matrix.

This definition has the advantage that it avoids defining a totally separate control. The filters are each
5 defined as one specific gobo. There is already a manual that defines gobos. This manual has filters added to it. This avoids the need for a manual of filters.

Another aspect defined by the present system is gobos that load and execute code. Some images cannot be described
10 in terms of control. For example, images may be defined as some random input. Some images progress with time and maintain no record of their previous state. These images are easily defined in terms of code and in terms of a progression from one time to another. Hence, the gobos that
15 load and execute code define a gobo that includes an associated area to hold static values. A gobo is requested and the code and variables that are associated with that gobo are copied into RAM. The variables are initially at a preset state. The code that is in the gobo portion is
20 executed, using the portions in the variables. The variables are modified at each pass through the portion.

Yet another feature of this system is intensity control over aspects of the image defining the gobo and dimming of the image defined thereby. Returning to the example of a
25 bit map with 24-bit color, such a system would include 8 bits of red, 8 bits of green, and 8 bits of blue. It can be

desirable to fade the image awhile keeping the color constant with intensity change.

One system uses an experimental technique to determine how to fade in order to maintain color constant and forms a
5 look-up table between the constant color and the look up table.

Another system directly maps the bits to color by defining the map as chromium using techniques from color television. For example, this takes the bits, and converts
10 the values indicating image to color or chrominance [©] and image luminance (Y) of the image. The conversion between RGB and Y/C is well known. The values of Y and C which correspond to the chrominance and luminance are then stored. The gobo can then be dimmed by reducing the Y, keeping C the
15 same. If desired, the Y/C can be converted back to RGB after dimming.

Another system allows reducing the number of bits for a bit map. Say, as an example, that it is desired to use a total of 8 bits to represent each pixel of the image. This
20 could then be apportioned between the desired bits with red having 3 bits, green having 3 bits, and blue having 2 bits. This limits the amount of information in any of these colors. Since there are only 2 bits for blue, there are only four levels of blue that can be selected. This is
25 often insufficient.

In this system, therefore, the bits are compressed by assuming that two adjacent lines have exactly the same

values. Hence, each two lines get the same color value (but can have different intensity values). Now in a system as described above, two lines of red can have 5 bits, two lines of green can have 6 bits, and two lines of blue can also have 5 bits. This provides an appropriate dynamic range for color at the expense of losing half the resolution for color.

Moreover, this has an additional advantage in that it allows 5 bits for grey scale in such a system.

A possible problem with such a system, however, as described above, is that the information would not necessarily be aligned on byte boundaries. It could, therefore, be necessary to take the whole image, manipulate it, and then put the whole image back.

The basic system is shown in FIG. 9. The luminance Y is an 8-bit representation of the brightness level of the image. The hue is then divided into dual-line multiple bits. Each bit is used for two lines each.

Dimming in such a system is carried out as shown in FIG. 9. For example, the blue bits 900 are multiplied in a hardware multiplier 902 by the luminance. Similarly, the green is multiplied in a second hardware multiplier 904 by the same luminance value. This controls the relative levels of red, green, and blue that are output on the RGB lines 910.

The multipliers that are used are very simple, since they simply multiply 8 bits by 3 bits. Therefore, a simple hardware multiplier can be used for this function.

This provides red, green, and blue color without loss
5 of data and with substantially perfect fading.

An additional feature described herein is a framing shutter gobo. A basic framing shutter is shown in FIG. 10. FIG. 10 shows the circular spot of the beam, and the analog shutter, often called a LECO. Each analog shutter 1000 can
10 be moved in and out in the direction of the arrows shown. Each shutter can also be moved in an angular direction, shown by the arrow 1002. There are a total of four shutters, which, in combination, enable framing the beam to a desired shape. For example, the shutter 1004 can be moved
15 to the position shown in dotted lines as 1006. When this happens, the effective image that is passed becomes as shown in hatched lines in FIG. 10. Another possibility is that the shutter can be tilted to put a notch into the image.

According to this system, another record is formed for
20 a gobo defining a framing shutter. The framing shutter gobo allows control of multiple values including the positions of the four framing shutters 1000, 1004, 1006, and 1008. Each framing shutter is defined in terms of its value d, corresponding to the distance between one edge 1010 of the
25 framing shutter and the edge 1011 of the original spot. In this system, the value d is shown representing the right-hand edge of the framing shutter. Another selectable value

is θ , which defines the angle that the front blade 1013 of the framing shutter makes relative to perfect horizontal or vertical. Yet another parameter which can be selected is offset O which represents the distance between the framing shutter edge 1010 and the ideal edge portion 1017. Other values can alternatively be specified. By controlling all these values, the Medusa shutter can in effect simulate any desired framing shutter gobo.

The video controller and line buffer 1114 can also be formed from the field-programmable gate array.

A number of different special gobos are defined according to the present system. Each of these gobos is defined according to the record format described above.

These include:

Oscilloscope. This enables simulating the output value of an oscilloscope as the gobo. For example, any value that can be displayed on the oscilloscope could be used as a gobo with a finite width. This could include sine waves, square waves, straight waves, sawtooth waves, and the like.

Other variable gobos include vertical lines, moire lines, laser dots, radial lines, concentric circles, geometric spiral, bar code, moon phases, flowers and rotating flowers, a diamond tiling within a shape, kaleidoscope, tunnel vision, and others.

Animated gobos correspond to those which execute codes described above. Some examples of these include, for example, self-animating random clouds; self-animating random

reflections; self-animating random flames, fireworks;
randomly moving shapes such as honeycombs, crosswords, or
undulations; foam; random flying shapes.

5 Control as a multi-layered image

As described above, the present system allows
sophisticated control of electronic images, and manipulation
of images. The control of the gobo can be selected as a
layered image mode. Each gobo then effectively becomes a
10 multi-part layered image.

A layout of the control for the system is shown in FIG.
12.

Layer 1 includes gobos plus effects. This is for a
simple image; with one gobo only and multiple effects. The
15 second layer includes additional information. This can
include gobos, non gobos, and/or additional effects. Third
layers and fourth layers are similarly situated. The
multiple layers collectively form a complex image.

Effectively, therefore, a complex image is formed by a
20 number of layers. A first layer has a gobo. Additional
functions are defined in the other layers. This forms a
composite image. Each layer can be operated on by the other
layers. For example, each layer can be individually rotated
or blurred, and/or rotation and blur can be applied to the
25 entire image. This enables the console to be controlled
incrementally. The gobo image is formed by adding one layer

then adding another layer. The multiple layers together effectively become the complex image.

Gobo selection occurs from a gobo catalog arranged in a tree structure as shown in FIG. 13. Operation follows a logical path within the catalog. A route shown as 1300 begins the operation of selecting from a tree-like operation.

A first branch of the tree includes commonly used gobos. The gobos are also arranged by some aspect of their look, including categories shown as geometric, random, pictures. Within the geometric gobos, the gobos can be arranged by the class of the geometry, shown here as random, round, triangles, and the like. Again within each branch, there can be possibilities. Within the "round" selection is single circle, two circles, three circles, four circles that are close, etc. Each route can have twenty branches.

The menu shown in FIG. 13 pops up each time a category is selected. An important feature keeps the commonly-used parts close to the root of the catalog. This can be done either by selecting those gobos which are most common and putting these in the commonly-used paths or by taking a statistical selection of those gobos which are used. For example, a memory location could store the number of times a gobo is used, and those with for example the sixty highest numbers could be stored in the commonly used paths.

Preferably those stored in the commonly used paths are also selectable via their parameters. The gobo catalog arranges

the gobos as a tree that is logically connected. Many gobos have multiple characteristics. Those gobos are then categorized based on all of those multiple characteristics, and those gobos can be accessed through any of the paths for any of the categories.

Each of the layers defines an action to be taken on the image that forms a stencil for the light beam projection. The layers are combined two at a time to form a composite image. Then, that composite image is combined with the next layer to form a new composite image, and so on.

The combination can be defined as any of the following:

- 1) A logical ``and'' of bits
- 2) A logical ``or'' of bits
- 3) A mathematical addition of the images
- 4) A multiplication of the images
- 5) A highest text precedence combination, where the brightest parts of the images are taken.
- 6) An exclusive or operation.

The layered output model is controlled by names. The following represents the terminology used in this embodiment.

GOBO

- The object from the catalog with no associated effects.

EFFECT

- Tools and filters that modify a gobo.

LAYER

A layer may have one of the following:

- Gobo
- Gobo with single or multiple effects
- Effect
- 5 - A combination of a gobo and effects within a layer only modifies effects the gobo within that layer. Four layers of this type can form a Composite Image.
- Layers 1-4 store in the gobo palette or directly into cues as ``orphans''.

10 EFFECT LAYER

- An Effect Layer is a special type of layer that does not contain a gobo. This layer defines and effect and modifies any layers prior to the effects layer.

COMPONENT

- 15 - A single gobo or effect within a layer.

MANUAL LAYER

- All functions that simulate motorized lamp operate at this layer. These effect proportionally, or completely, anything that is stored in the image palette. The output of this layer is stored into
- 20 cues as individual cue records.

- Simple and Complex images do not reside on the manual layer.

IMAGE

- 25 - The combination of layers 1-4, using any of the combination techniques described above.

SIMPLE IMAGE

- A one layer image.

COMPLEX IMAGE

- An image having more than one layer.

COMPOSITE IMAGE

5 - The combination of images with the manual layer.

The image layers described herein facilitate constructing and editing an image as described herein.

10 The gobo menu is shown in Fig. 13. A paper based gobo catalog exists in a similar form. The gobo menu of Fig. 13 is displayed on the Menu panel. The gobos are organized by type and also categorically.

15 Each gobo is assigned a catalog number. This number can be used as a quick way to select a gobo. It is possible at any time to enter the numeric catalog number to access a gobo without entering the gobo menu.

Gobos selected from the Menu panel are sent to the selected fixtures and can then be stored into cues or into a palette.

20 A user-definable portion of the catalog is used for custom images.

Variable/Animation Gobos

25 A variable gobo is selected from the Menu panel. The appropriate number of unassigned or ``wild'' encoders automatically load. These encoders obtain control over the

variable. A variable gobo can be changed in real time control via the wild encoders.

The effects menu is an additional menu mode that contains a list of all filters or tools used to modify an
5 image. This does NOT include motorized functions.

The effects menu gives the user access to effects that may not be loaded with control on an MPD or a wild encoder.

AUTO/MANUAL PALETTE COLOR

10 Any palette index may be prescribed a key color for organizational purposes.

The layer editor is an expanded palette editor that allows views and control while building a complex image.

This editor may be used or accessed manually, from a
15 palette, or from within an Image Cue Record.

The editor includes copy/paste/delete options within the editor for layer modification.

The Menu panel is used to display layer contents.

THE MANUAL LAYER

20 Most components of the manual layer are controlled from a manual panel driver, Wild Encoder, or Numeric entry. Color, focus, and shutters are selected, on the manual layer from palettes.

Components of the manual layer can store into cues as
25 individual cue records.

Hardware limitations may determine how many effects can be simultaneously processed. Until hardware is tested, a reasonable number of effects may be 12.

FILTERS

- 5 A new filter is added to aid effect management, called ``Effect''.

IMAGE RECORDS

An Image Record contains all the information for a simple or complex image.

- 10 TIMING AND DELAY defines

Timing on components.

Timing on layers.

Timing on Image Records.

Timing on manual panel drivers.

- 15 TARGETING CUES AND CHASES

TARGETING

A cue record that adds or changes an effect in layer(s) 1-4 without changing the stored value of the Image.

Verbal explanation.

- 20 COMBO PALETTE

Layer Maps

Layer Palette

Layer Presets

OPERATING MODES

- 25 Shutter

Fade

Although only a few embodiments have been described in detail above, those having ordinary skill in the art certainly understand that modifications are possible.

5 98673.LJ1

10055011.doc

What is claimed is:

1. A stage lighting system, comprising:
a source of light producing a light beam;
an electronic device in a path of the source of light,
and which receives an electronic file representing an image to
be used to shape the light beam, wherein said electronic file
comprises a plurality of polygons which are defined as
vectors.

2. A system as in claim 1, further comprising a digital
signal processor, which carries out arithmetic operations on
said vectors.

3. A device as in claim 2, wherein one of said
arithmetic operations comprises rotating the image and thereby
rotating a shaped beam of light which has been shaped by the
image.

4. A device as in claim 2, wherein one of said
arithmetic operations comprises matrix arithmetic carried out
on the polygons.

5. A method of shaping a beam of light, comprising:

providing a device which shapes a stage lighting beam based on a digital signal that is applied thereto;

a plurality of gobo layers, at least a first of said layers being a gobo image to shape the beam and a second layer forming a filter for the gobo image produced by said first layer, said second layer operating to change the image of the first layer.

6. A method as in claim 5, wherein said filter causes scaling of the gobo image.

7. A method as in claim 5, wherein said filter is a decay of the gobo image.

8. A method as in claim 5, wherein said filter is a blur of the gobo image which causes the image to be out of focus in some locations.

9. A method as in claim 5, wherein said filter is a simulation of the effect of the optical glass in an analog gobo.

10. A method as in claim 5, wherein said filter includes information which is arithmetically combined with the first image.

11. A method as in claim 10, wherein said arithmetic combination is via one of an "and" and "or", or an "exclusive or".

12. A method of representing a plurality of different gobos, comprising:

forming a manual, having different parts which represent said different gobos;

adding filters for said gobos to said manual, said filters representing effects which can be carried out on other ones of said gobos; and

allowing selection of any of said gobos and/or any of said filters over a common user interface.

13. A method as in claim 12, wherein said filter is a filter that one of scales the image, decays the image, or blurs the image.

14. A method of displaying light from a stage light, comprising:

projecting said light through a digital device which is digitally controllable to determine a shape of projected light based on a digital control signal; and

driving said digital device with a file that executes code to form said digital control signal, which changes at different times.

15. A method as in claim 14, wherein said code comprises an associated area to hold static values and variable portions, and further comprising modifying said variable portions.

16. A method comprising:

defining an image as specified numbers of bits of primary colors;

translating the image from a bit-based form which defines in terms of its primary colors, into chrominance and its luminance values indicative thereof;

dimming the image by reducing the luminance value while maintaining constant chrominance; and

reconverting the chrominance and luminance back into said bit based form.

17. A method as in claim 16, further comprising using a digitally controllable pixel level device in the path of a light beam, and controlling said digitally controllable pixel level device using said bit-based form.

18. A method as in claim 17, wherein said digitally controllable device is a digital mirror device.

19. A method as in claim 16, further comprising apportioning said chrominance as bits between a total allotted number of bits.

20. A method as in claim 19, wherein there are a total allotted number of 8 bits, and wherein two of the primary colors get three bits and the other of the primary color gets two bits for its chrominance.

21. A method as in claim 19, further comprising assigning adjacent lines the same color values, and providing additional resolution of said color values by combining said color values.

22. A method as in claim 21, further comprising modifying said image to maintain byte boundaries.

23. A method as in claim 16, further comprising combining multiple images together to provide twice as many available bits for the combined lines.

24. A method as in claim 16, further comprising dimming the image by multiplying each of the luminances associated with each of the chrominances by a specified value.

25. A method of forming a digital framing shutter, comprising:

defining aspects of a framing shutter, including four shutters, each of which have a straight line portion for framing the shutter, said straight portion being definable by its position in a light beam and its angle; and

defining a record for a gobo which simulates said framing shutters.

26. A method as in claim 25, wherein said framing shutter record includes multiple values for positions of each of four framing shutters including a value D representing a distance between a portion of the framing shutter and an edge of an original spot of a light beam, and a value θ

defining an angle between the blade between the framing shutter and the specified angle.

27. A method as in claim 26, further comprising defining an offset representing a distance between an edge and an ideal edge.

28. A method as in claim 27, wherein said value D comprises a distance between an edge of the framing shutter and an edge of the original spot.

29. A method of defining an image to be projected by a light beam projector, comprising:

defining a desired gobo to be displayed as a multilayered image, where at least one of a plurality of layers includes information representing at least one gobo, and at least one other layer has the capability of including at least one effect for the at least one gobo.

30. A method as in claim 29, wherein the at least one layer includes a gobo defined by an image file, and all other layers operate on the first layer by modifying said image file.

31. A method as in claim 30, wherein a second layer includes a filter that operates on a gobo in a first layer.

32. A method as in claim 30, wherein an operation of a second layer is applied to an entire image, formed of all the layers.

33. A method as in claim 30, wherein an operation of a second layer is applied to only specified layers.

34. A method as in claim 33, wherein said operation is applied incrementally to the entire image.

35. A method as in claim 30, further comprising forming a manual, having different parts which represent a plurality of said gobos;

adding filters for said gobos to said manual, said filters representing effects which can be carried out on other ones of said gobos; and

allowing selection of one of said gobos and/or filters over a common user interface.

36. A method as in claim 35, wherein said catalog is defined as trees with branches.

37. A method as in claim 36, wherein said branches are defined according to both commonality of use and by categories.

38. A method of arranging gobos in a catalog, comprising:

organizing the gobos both in terms of both commonality of use, and category of their actual formation in a tree structure, which has branches at different locations; and

keeping more common gobos closer to a bottom portion of the tree.

39. A method as in claim 38, wherein said organizing comprises organizing into a manual, having different parts which represent said gobos;

adding filters for said gobos to said manual, said filters representing effects which can be carried out on other ones of said gobos; and

allowing selection of one of said gobos and/or filters over a common user interface.

40. A method as in claim 38, wherein at least one of the gobos is listed multiple times in the catalog.

41. A method as in claim 40, further comprising using items from the catalog to form a plurality of layers, and combining said layers to form a composite image.

42. A method as in claim 41, wherein said composite image is formed by a mathematical combination of bits in the catalog.

43. A method as in claim 42, wherein said combination is a logical AND, a logical OR, a mathematical addition or multiplication, or a highest text precedent combination where brightest parts of the image are taken, or an exclusive OR.

44. A method as in claim 38, wherein said gobo is a variable animation gobo.

45. A method as in claim 44, wherein said variable animation gobo includes a menu mode.

ABSTRACT

A control of gobos defend by records in the gobo. The gobos are formed by menued shapes.

10052344.doc

FIG 1

MEDUSA

OPTICS

115

DM

100

113

102

99

DSP

109

ROM

111

COMM

106

ELECTRONIC

ICN

console

110

120

122

124

126

Go to edit

104

Hand-drawn diagram of a console interface. A large rectangle is labeled "console" at the bottom. Inside it is a smaller rectangle containing four circles, each with a number below it: 120, 122, 124, and 126. To the left of the console rectangle is a vertical line labeled "i/c". Above the console rectangle is a vertical line labeled "Gc bc edit". To the right of the console rectangle is a vertical line labeled "ICON". To the far right is a vertical line labeled "104".

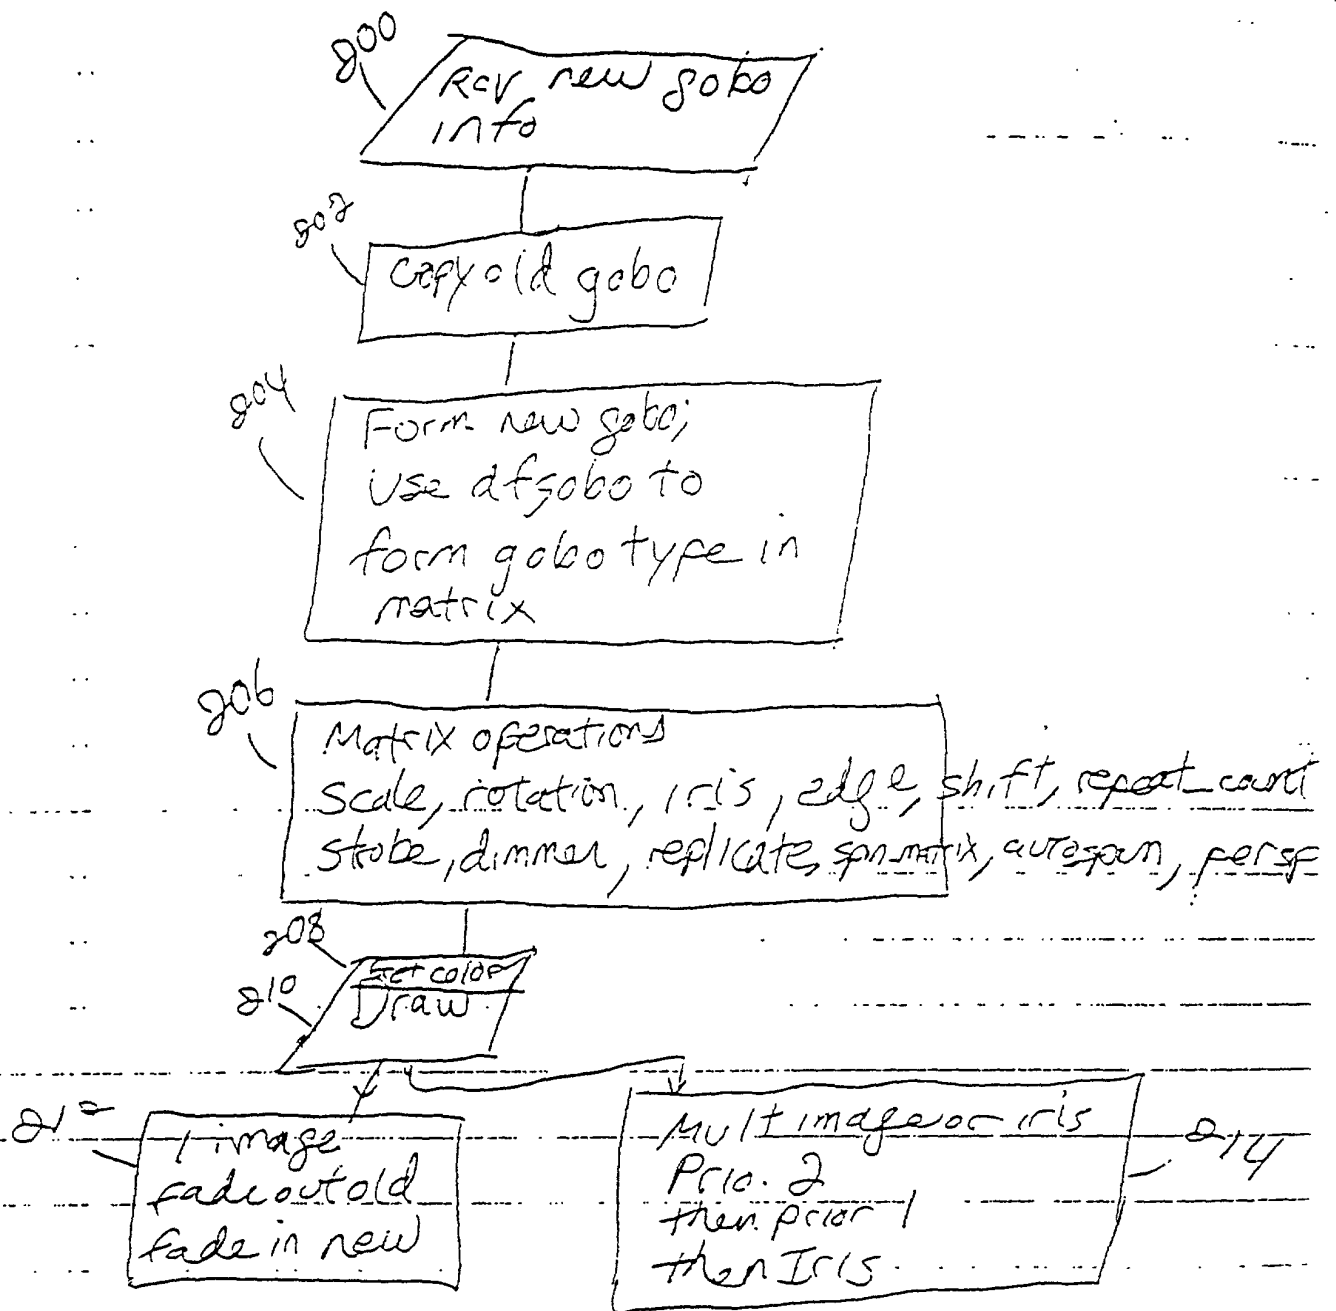


FIG 2

300

Create a circle
of size $d = 1000 \text{ pixels}$
at $(0,0)$

302

Multiply circle by
50% (scaling factor) Scale

304

FOR $N = 1$ TO 4

306

SHIFT TO $\pi/4$ SHIFT

308

SPIN MATRIX
BY 90° SPIN
MATRIX

310

REPLICATE REPLICATE

312

NEXT N




FIG 4A

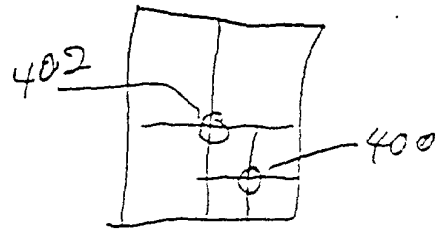


FIG 4E




FIG 4B




FIG 4F




FIG 4C




FIG 4G




FIG 4D

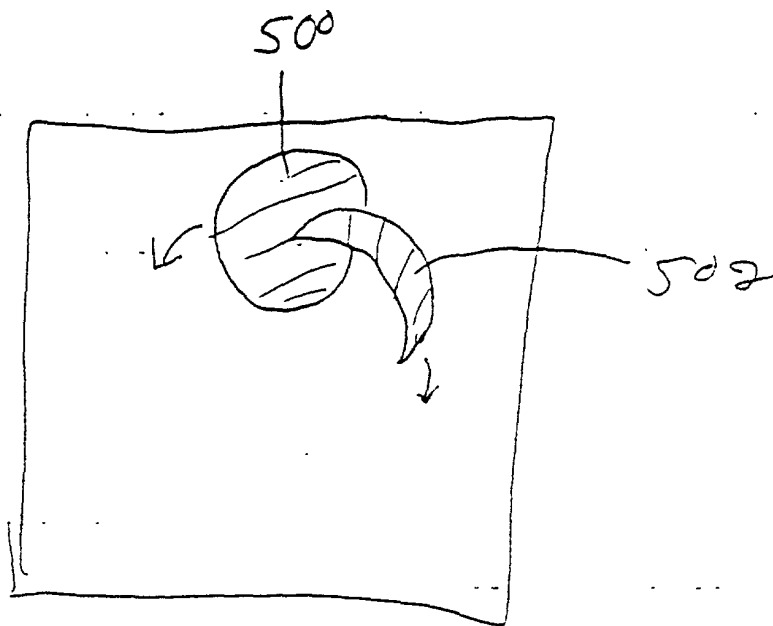


FIG 5

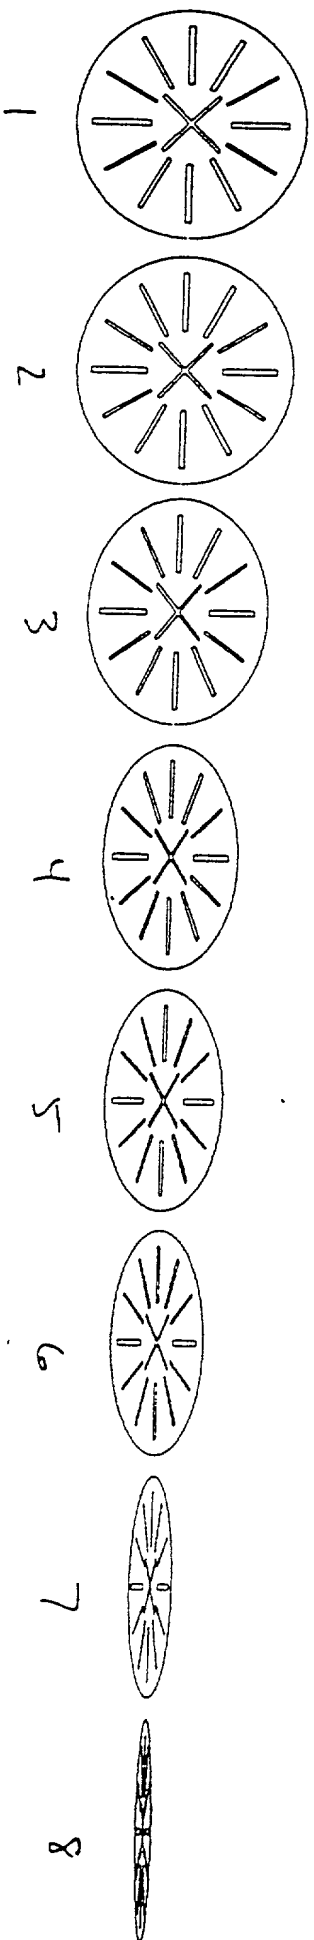


FIG 6

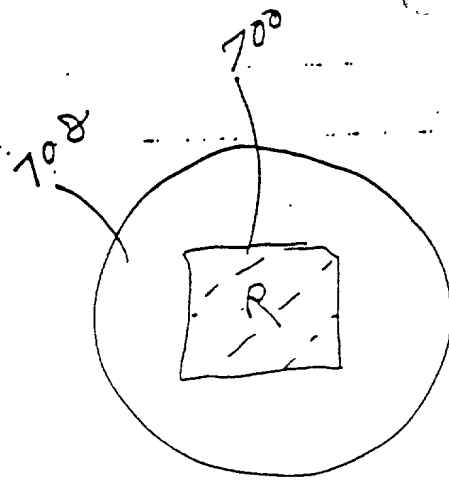


FIG 7A

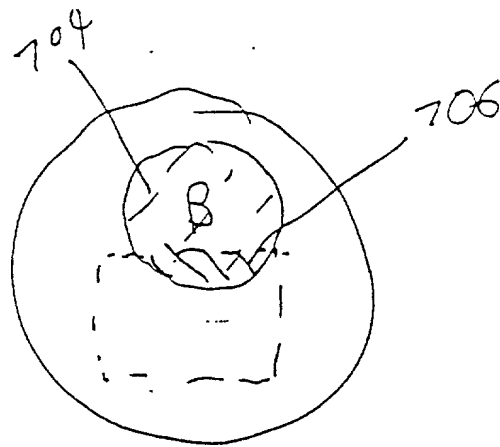


FIG 7B


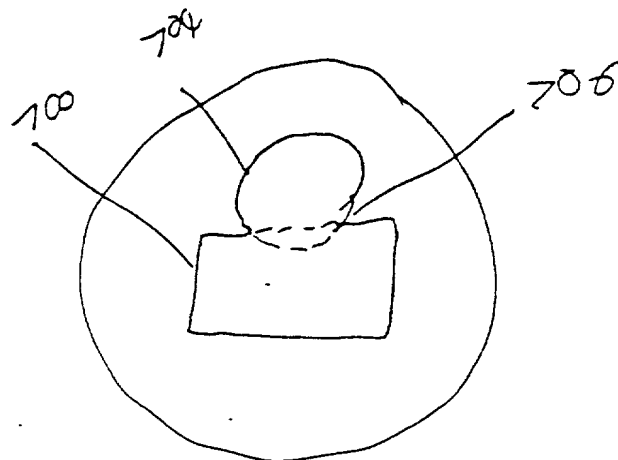


FIG 7C

Year	1950	1951	1952	1953	1954	1955	1956	1957	1958	1959	1960	1961	1962	1963	1964	1965	1966	1967	1968	1969	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1950	1950	1951	1952	1953	1954	1955	1956	1957	1958	1959	1960	1961	1962	1963	1964	1965	1966	1967	1968	1969	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100

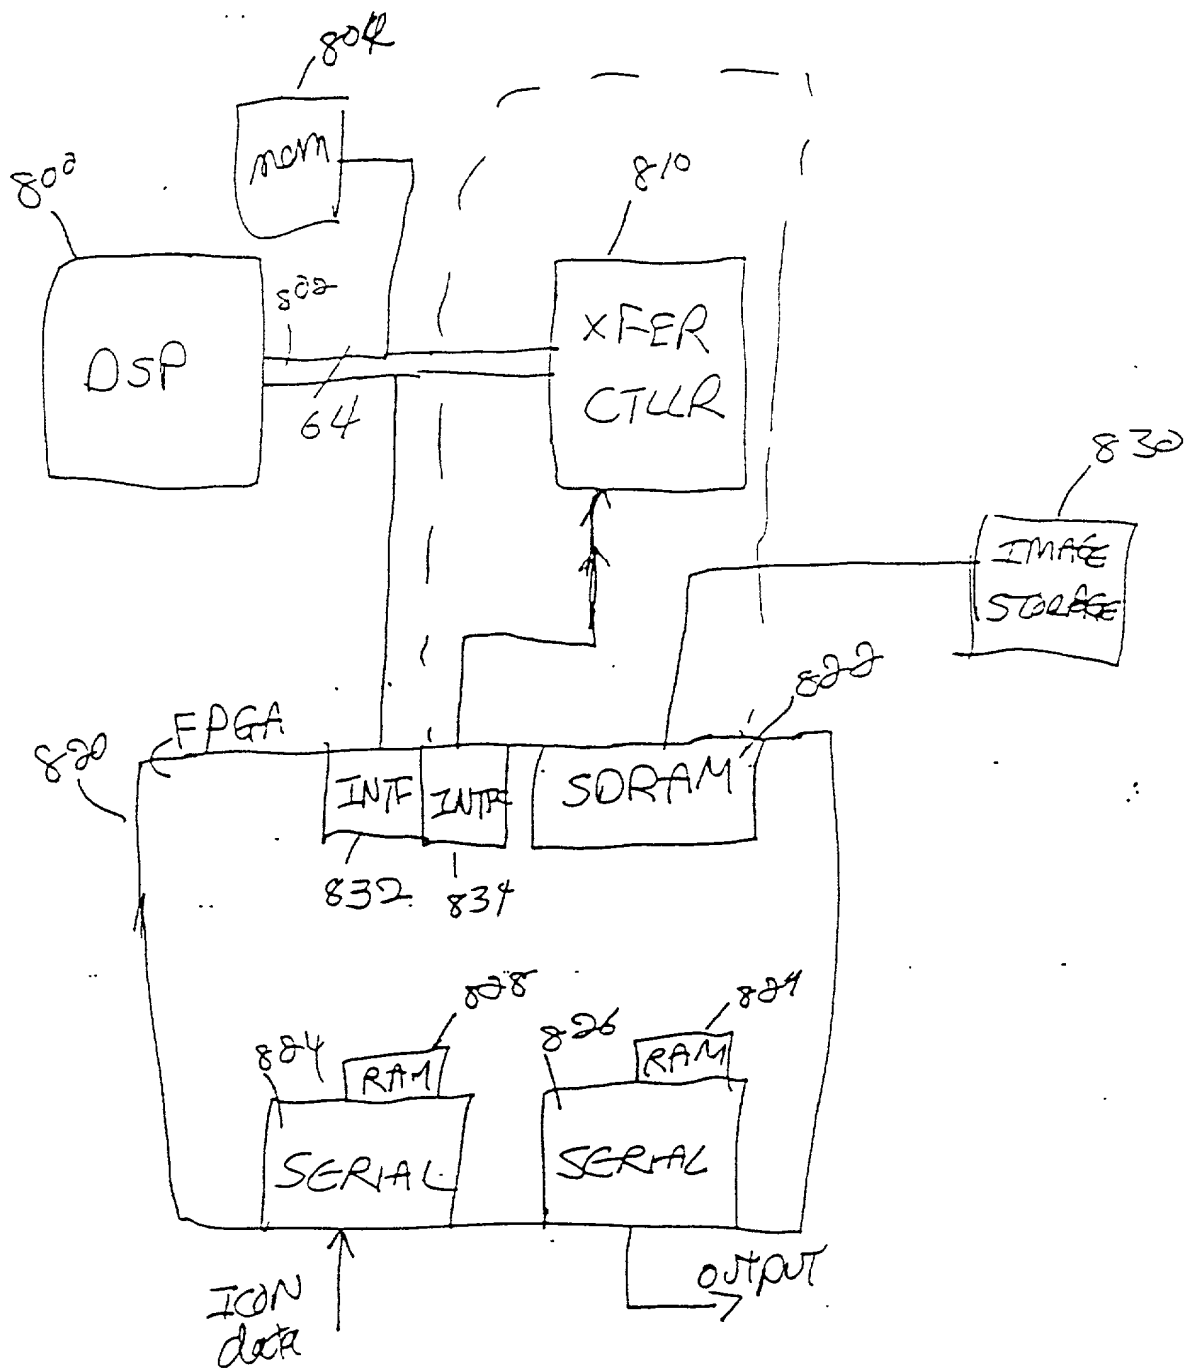

F 12 8.

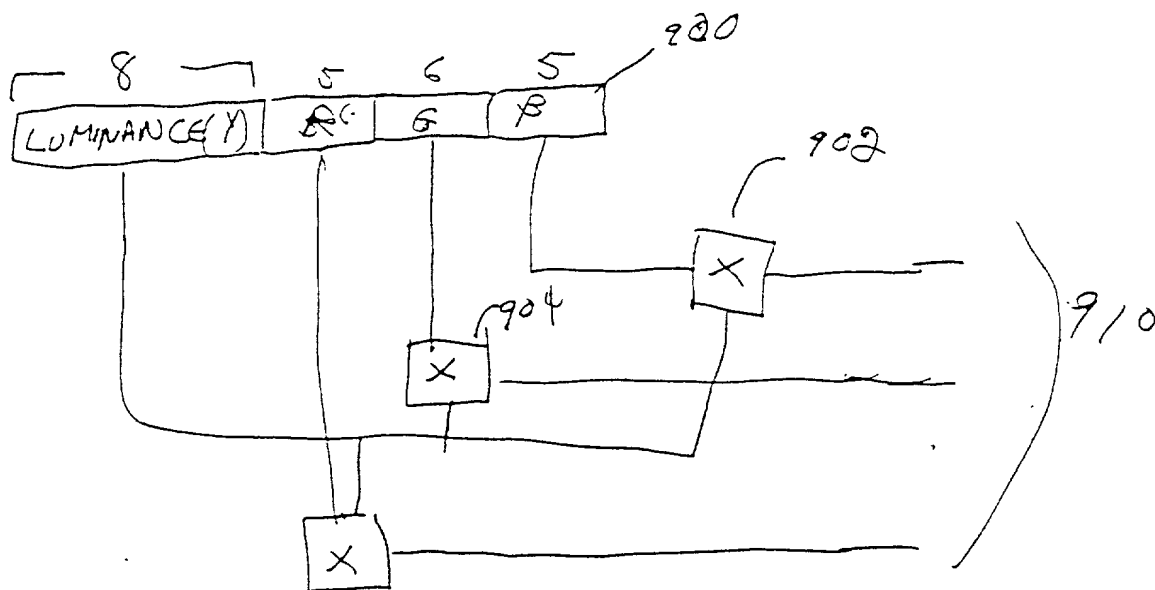


FIG 9

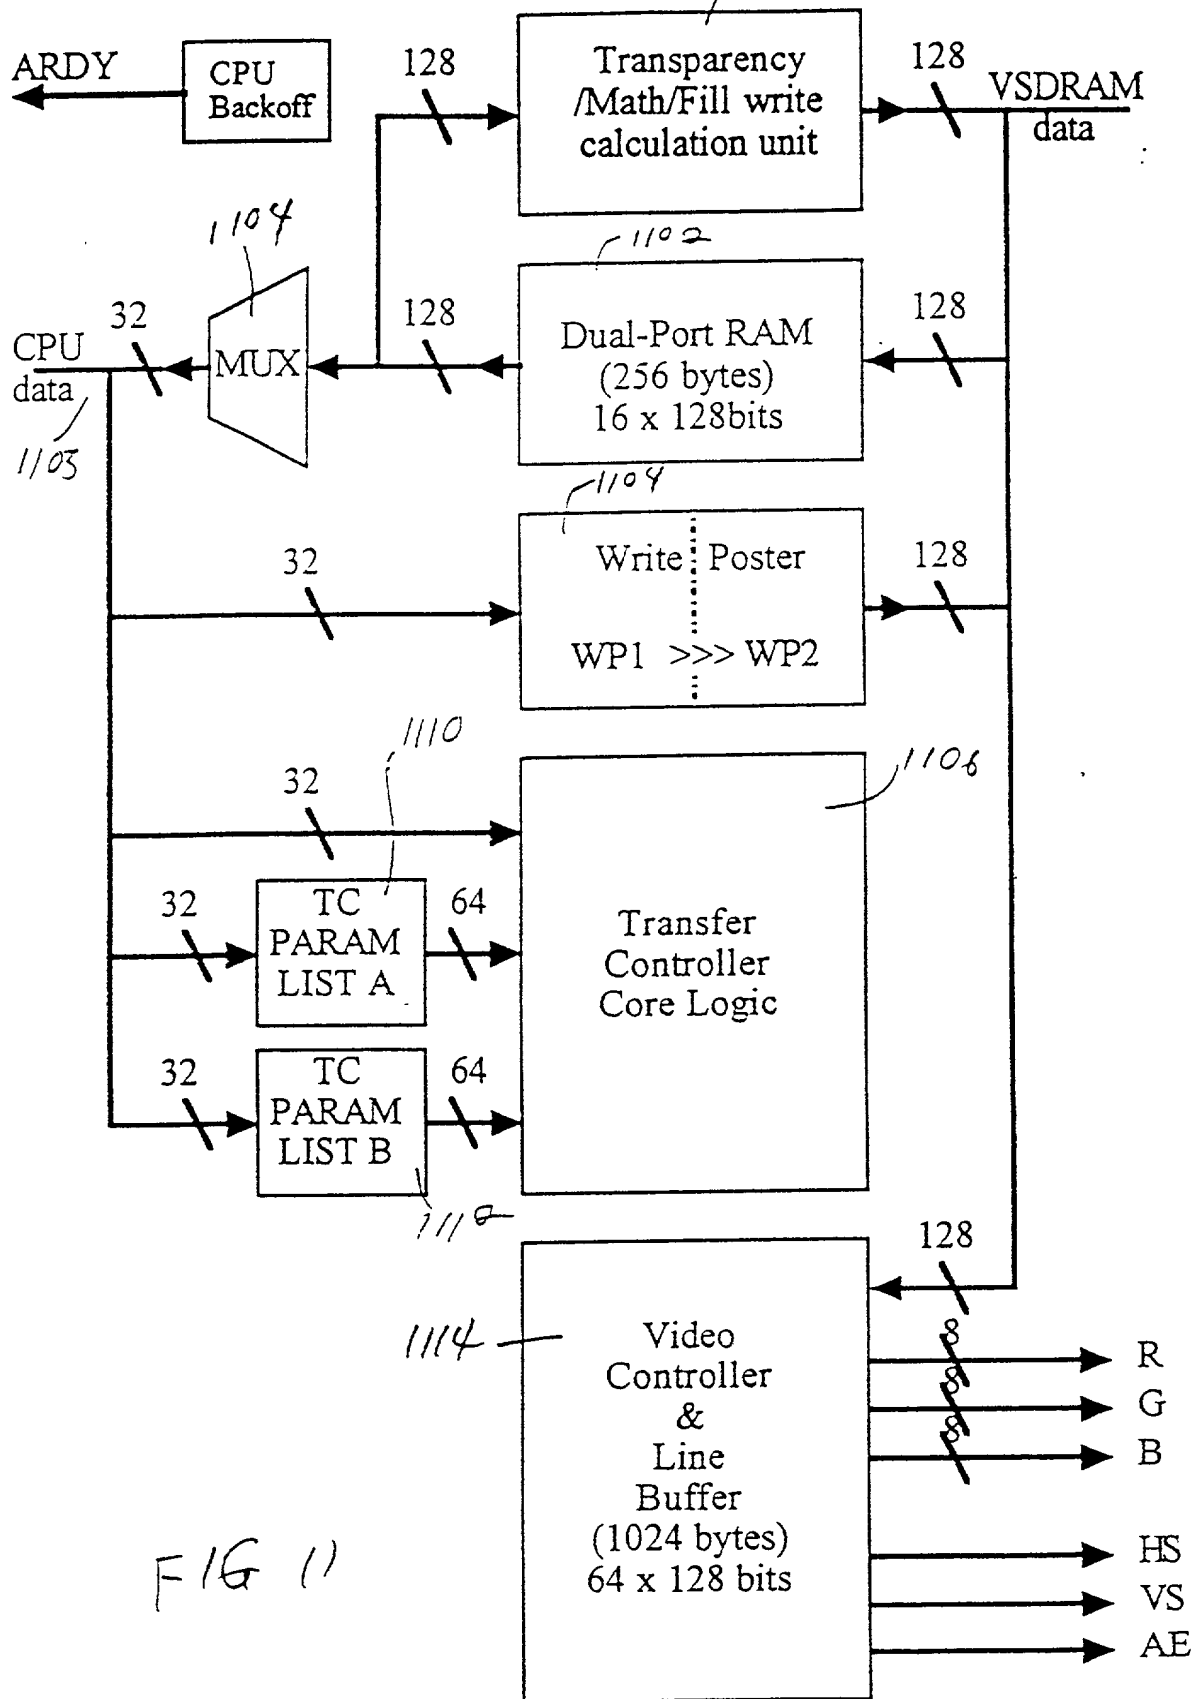


FIG 11

filling manipulating images

look at Medusa as a layered image model

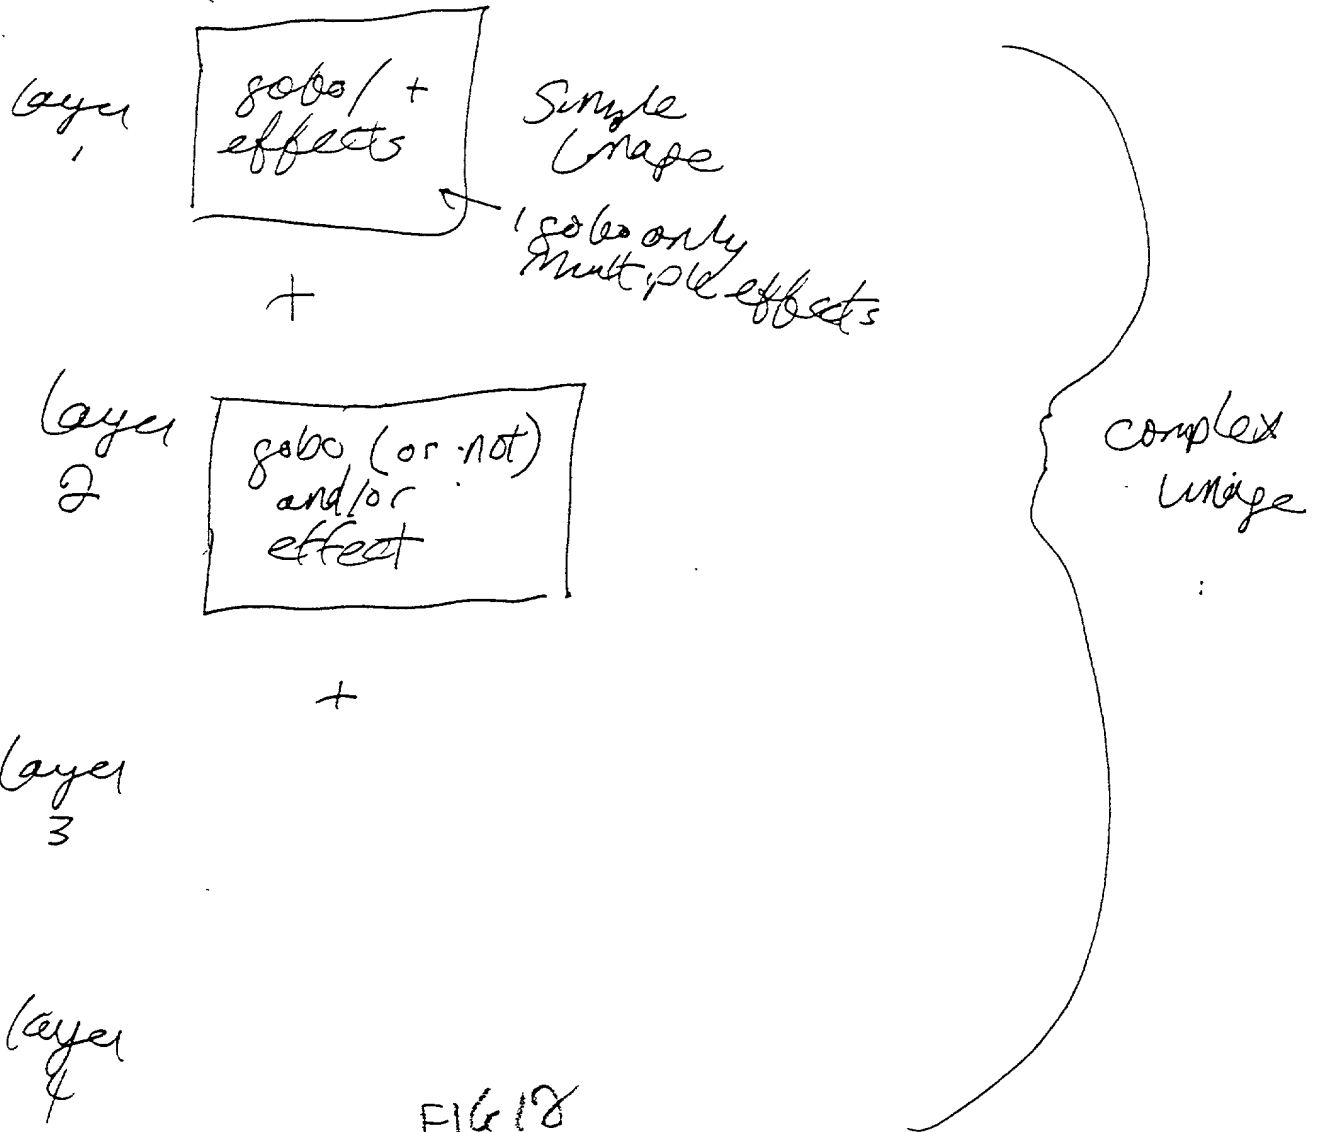


FIG 18

+
name / layer — add functions — (rotation, blur to whole image) — compos. image
also allows

Console button to add another layer

Go to selector
From hierarch. catalog

Move fr/ root to gobos w/ part properties
& choose those

logical path

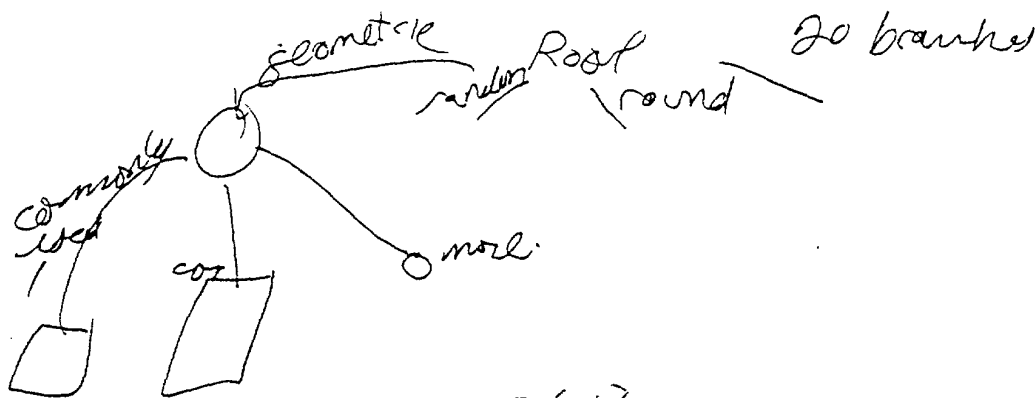


FIG:3

Common stuff - close to root of
Catalog

